# Perform

## 2 Slot ATCA
## AC Shelf
## User Manual

**May 2007** **Revision**

# Table of Contents

**TABLE OF CONTENTS** ..... **II**

**TABLE OF FIGURES** ..... **IV**

**LEGAL NOTICE AND WARRANTY** ..... ERROR! BOOKMARK NOT DEFINED.

**ORDERING INFORMATION** ..... ERROR! BOOKMARK NOT DEFINED.

**SAFETY INSTRUCTIONS** ..... **VII**

**REVISION HISTORY** ..... **IX**

**ABOUT THIS DOCUMENT** ..... **X**

**1 INTRODUCTION** ..... **12**

1.1 OVERVIEW OF ASIS SHELF PRODUCTS ..... 12

1.2 PERFORM ATCA AC SHELF ..... 12

**2 UNDERSTANDING THE SHELF COMPONENTS** ..... **13**

2.1 PLATFORM COMPONENTS ..... 13

*2.1.1 Shelf and Boards* ..... *13*

*Fixed Board* ..... *16*

*Removable Boards* ..... *16*

*2.1.2 Card Cage* ..... *16*

*2.1.3 Backplane* ..... *17*

*Features* ..... *17*

*Update-Channel Connections* ..... *17*

*Synchronization Clock Interface* ..... *18*

*2.1.4 Module Slot Identification* ..... *19*

*2.1.5 AC power supply* ..... *19*

*Grounding Requirements and Power Input* ..... *20*

*2.1.6 Fan Tray* ..... *21*

*2.1.7 Air Filter Tray* ..... *21*

*2.1.8 Blank Panels with/without air baffles* ..... *22*

*2.1.9 Shelf ID Board* ..... *23*

*2.1.10 Holder for Cable Management (Optional)* ..... *23*

2.2 SHELF COOLING ..... 24

*2.2.1 Overview* ..... *24*

*2.2.2 Fan Tray Design* ..... *24*

*2.2.3 Performance* ..... *24*

*2.2.4 Fan Speed ..... 25*
*2.2.5 Rear connection boards ..... 25*
**3 INSTALLING THE SHELF ..... 26**
3.1 TOOLS REQUIRED ..... 26
3.2 SITE PLANNING ..... 26
3.3 CHECKING PACKAGE CONTENTS ..... 27
3.4 INSTALLATION STEPS ..... 27
3.5 RACK MOUNTING ..... 27
*3.5.1 Shelf Grounding ..... 28*
*3.5.2 Installer Grounding ..... 28*
3.6 SHELF APPLICATION CARD INSERTION ..... 29
3.7 REDUNDANT MODULE INSTALLATION ..... 29
*3.7.1 Redundant Shelf Management Card Installation ..... 29*
**4 MAINTENANCE AND TROUBLESHOOTING ..... 30**
4.1 PERFORMING PERIODIC MAINTENANCE ..... 30
*4.1.1 Fan Tray Visual Inspection ..... 30*
*4.1.2 Air Filter Cleaning And Replacement ..... 30*
4.2 HANDLING ELECTROMAGNETIC INTERFERENCE ..... 31
4.3 EXTRACTING MODULES ..... 32
*4.3.1 FRU Module Extraction ..... 32*
*4.3.2 Power Supply Extraction ..... 32*
*4.3.3 Fan Tray Replacement ..... 32*
*4.3.4 E²PROM Replacement ..... 33*
*4.3.5 Third-Party-Module Replacement ..... 34*
4.4 HANDLING ALARMS ..... 35
*4.4.1 Visual Alarms ..... 35*
*4.4.2 Software Alarms ..... 36*
4.5 HOT-SWAPPING FRUS ..... 36
4.6 RESETTING THE SYSTEM ..... 37
4.7 TROUBLESHOOTING ..... 38
**5 SYSTEM SPECIFICATIONS ..... 39**
5.1 CERTIFICATION ..... 39
5.2 TECHNICAL DATA ..... 39
5.3 ACRONYMS USED IN THIS MANUAL ..... 42

# Table of Figures

FIGURE 1 – SHELF BLOCK DIAGRAM ..... 1
FIGURE 2 – SHELF FRONT VIEW ..... 1
FIGURE 3 – SHELF REAR VIEW ..... 1
FIGURE 4 – SHELF CHASSIS WITH CABLE HOLDERS ..... 1
FIGURE 5 - SHELF COMPONENT POSITIONING ..... 1
FIGURE 6 – SYNCHRONIZATION CLOCK AND UPDATE CHANNEL PIN ASSIGNMENTS ..... 1
FIGURE 7 – BACKPLANE LAYOUT ..... 1
FIGURE 8 – SLOT ALLOCATIONS ..... 1
FIGURE 9 - SHELF ADDRESSING ..... 1
FIGURE 10 – ATCA 1200W AC POWER SUPPLY ..... 2
FIGURE 11 –DISTRIBUTION OF POWER ON SHELF ..... 2
FIGURE 12 – FAN TRAY ..... 2
FIGURE 13 – AIR FILTER TRAY ..... 2
FIGURE 14 - BLANK BOARD PANEL AND BLANK RTM PANEL ..... 2
FIGURE 15 - SHELF ID BOARD WITH TWO E²PROMS (REAR COVER REMOVED) ..... 2
FIGURE 16 - FAN AND AIR FILTER TRAYS ..... 2
FIGURE 17 - REAR GROUNDING SCREWS ..... 2
FIGURE 18 - FRONT ESD SOCKET ..... 2
FIGURE 19 – SHELF AIR FILTER AND POWER SUPPLY AIR FILTER EXTRACTION ..... 3
FIGURE 20 – EXTRACTING A FAN TRAY ..... 3
FIGURE 21 - FAN CARD WITH E²PROMS ..... 3

Deleted: e

# © ASIS Ltd. 2007 Legal Notice and Warranty

Information in this document is provided in connection with Asis products. no licens express or implied, by estoppel or otherwise, to any intellectual property rights is gr by this document. except as provided in Asis terms and conditions of sale for such products, Asis assumes no liability whatsoever, and Asis disclaims any expressed o implied warranty, relating to sale and/or use of asis products including liability or warranties relating to fitness for a particular purpose, merchant ability, or infringem any patent, copyright or other intellectual property right.

Deleted: ¶

Asis warranty will be for the quality of the Asis Perform 2-Slot ATCA AC Shelf for a p of one year after the shipment of the product.

Deleted: ¶

Asis may make changes to specifications and product descriptions at any time, witho notice.

ASIS © Ltd. 2007

Formatted: ItemA
Deleted: ¶
Deleted: .co.il
Formatted: ItemA
Deleted: Headquarters
Deleted:
Formatted: DescriptionB, Indent: Before: 2 cm, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers
Formatted: Font: (Default) Verdana, Bold, Complex Script Font: Times New Roman, Not Bold
Deleted: ,
Formatted: Font: (Default) Verdana, 10 pt, Bold, Font color: Auto, Complex Script Font: Times New Roman, 10 pt, Not Bold
Formatted: Font: Bold, Complex Script Font: Not Bold
Formatted: Font: (Default) Verdana, Bold, Complex Script Font: Times New Roman, Not Bold
Deleted: ¶
Deleted: , USA¶
Formatted: Indent: Before: 1.92 cm, First line: 0.08 cm
Formatted: Font: (Default) Verdana, 10 pt, Font color: Auto, Complex Script Font: Times New Roman, 10 pt
Deleted: e
Deleted: phone
Deleted:
Formatted: Font: (Default) Verdana, Complex Script Font: Times New Roman
Formatted: Font: Not Bold, Complex Script Font: Bold
... [1] tted
Formatted: Indent: Before: 2 cm
Deleted:
... [2] tted

# Contact Information

in order to retrieve further information about any of Asis products either described in this document and/or related systems and/or components, please contact an ASIS representative at:

**Asis Headquarters**

**3 Galgalei Haplada St.**

**Kfar Saba, ISRAEL 44422**

Telephone: **+972-73-233-6633**

Fax: **+972-73-233-6634**

E-mail: sales@asis-pro.com

**Asis North America**

**11067 Caminito Arcada**

**San Diego, CA, 92131 USA**

**US toll free: 888 3asisus (888 327-4787)**

Tel/Fax: 858 776-1421

E-mail: salesna@asis-pro.com

See the ASIS web site at **http://www.asis-pro.com** .

# Safety Instructions

This symbol indicates potential safety hazards regarding product operation or maintenance to operator or service personnel.

Formatted: ItemB, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

## General Safety Practices

Before handling the board, read the instructions and safety guidelines on the followi pages to prevent damage to the product and to ensure your own personal safety.

- Always use caution when handling/operating the board. Only qualified, experienced, authorized electronics service personnel should access the interior of the equipment. The power supplies produce high voltages an energy hazards, which can cause bodily harm.
- Use extreme caution when installing or removing components. Refer to the installation instructions in this document for precautions and procedures. If you have any questions, please contact ASIS Technical Support.
- Always follow the procedural instructions for component removal and replacement in sequence.

Formatted: Indent: Before: 2.22 cm, Hanging: 0.63 cm, Bulleted + Level: 1 + Aligned at: 2.22 cm + Tab after: 2.86 cm + Indent at: 2.86 cm

Deleted: ¶

Formatted: ItemB

## Power

Beware Electrical shock hazard , before any attempt to service the device be su

That the device is electrically isolated !!!

High voltages are present inside the chassis when the unit's power is plugged into a electrical outlet. Turn off system power, turn off the power supply, and then disconn the power cord from its source before removing the chassis cover.

Turning off the system power switch does not remove power to components.

Make sure the work environment is grounded, and use a grounding wrist strap when handling the product.

## ESD Safety Practices

Many components described in this document can be damaged by *electrostatic dischar (ESD)*. Follow the precautions described here and before specific procedures in the document to protect static-sensitive components from ESD-related damage.

Static electricity can harm system boards. Perform service at an ESD workstation an follow proper ESD procedure to reduce the risk of damage to components. ASIS stro encourages you to follow proper ESD procedure, which can include wrist straps and smocks, when servicing equipment.

Take the following steps to prevent damage from electrostatic discharge (ESD):

- When unpacking a static-sensitive component from its shipping carton, do not remove the component's antistatic packing material until you are ready to install the component in the system. Just before unwrapping the antistatic packaging, be sure you are at an ESD workstation or grounded. This will discharge any static electricity that may have built up in your body.
- When transporting a sensitive component, first place it in an antistatic container or packaging.
- Handle all sensitive components at an ESD workstation. If possible, use antistatic floor pads and workbench pads.
- Handle components and boards with care. Don't touch the components or contacts on a board. Hold a board by its edges or by its metal mounting bracket.
- Do not handle or store system boards near strong electrostatic, electromagnetic, magnetic, or radioactive fields.

**Deleted:** ¶
Operating Environment¶
¶
... [3] **erature**

**Formatted:** Highlight

# Revision History

| Number | Date | Comments | Author |
|---|---|---|---|
| 1.0.0 | May 2007 | Initial release | Yossi Kuzi |

# About this Document

This document provides technical information for the Perform 2-Slot ATCA AC Shelf .

It is intended for technical staff tasked with installing, setting up and configuring the system, and providing troubleshooting assistance and servicing.

## *Related Documents*

For information on the Shelf Manager, see the ASIS Shelf Manager Board user manual.

Instructions relating to software installation and documentation for application software development for this platform are available in the Shelf Manager External Interface Reference Manual.

For Asis product information and additional resources, please visit the Asis website at **www.asis-pro.com**.

Downloads (manuals, release notes, software, etc.) are available via the Technical Support Library product links at **www.asis-pro.com (for registered customers)**.

Information about PICMG (PCI Industrial Computer Manufacturers Group) and the ATCA standard may be accessed on the PICMG Web site at **www.picmg.com.**

Formatted: ItemB

## *Chapters and Their Contents*

| | | | |
|---|---|---|---|
| **1** | **Introduction** | General overview of the product family and the shelf. | Pg. 12 |
| **2** | **Understanding the Shelf Components** | Describes the shelf and its components, including the boards installed in the shelf: Backplane, Power Entry Module, Shelf ID Boards. Describes the cooling capabilities of the shelf. | Pg. 13 |
| **3** | **Installing the Shelf** | Procedures and precautions involved in product installation | Pg. 26 |
| **4** | **Maintenance And Troubleshooting** | Periodic maintenance, troubleshooting and diagnostic procedures, as well as module replacement instructions | Pg. 30 |
| **5** | **System Specifications** | Detailed quantitative information about the system's dimensions and operational parameters, operation limitations, certification and standard compliance | Pg. 39 |

Deleted: "

Deleted: "

## *Style Conventions*

| | |
|---|---|
| Verdana | Regular text. |
| **Arial Bold** | Commands, keys and other parts of the user interface. |
| *Arial Italics* | Names of classes, methods, arguments, exceptions, properties, etc. Also used for special terms, the first time they appear. |
| `Monospace` | Text displayed on the LCD or on a computer attached to the product. |
| | **Notes,** which offer an additional explanation or a hint on how to overcome a common problem. |
| | **Warnings**, which indicate potential safety hazards regarding product operation or maintenance to operator or service personnel. |

# 1 Introduction

This chapter includes a summary of the Asis Pro shelf product line and a brief overview the Perform 2-Slot ATCA AC Shelf. For acronyms used in this document see Section 5.3

## 1.1 Overview of ASIS Shelf Products

As for ATCA Shelf , ASIS offers two product families :

- **Perform** for cost-sensitive, yet demanding applications
- **Perform** for top-of-the line solutions, for environments in which high levels of performance, availability and reliability are mandatory**.**

Deleted: ance

## 1.2 Perform ATCA AC Shelf

The Perform 2-Slot ATCA AC Shelf offers the reliability and availability of the Telco-grad standards in a cost-Perform package, where maximum possible performance (backplan interconnect bandwidth, power levels and thermal capabilities) is provided in a low-cost shelf.

The system can be used by developers (reduced time-to-market) as well as for deployment. It offers optional redundancy for power input and management functions. shelf assemblies are designed using Field-Replaceable Units (FRUs), thus enabling easy and fast field maintenance with minimum or no downtime.

In addition, an ASIS cable-holder frame can be fitted to both side-mounting flanges of the shelf .

The shelf is targeted for FCC, UL and CE certification, and it is designed to comply with NEBS Level-3 and ETSI.

The Perform 2-Slot ATCA AC Shelf fully complies to AdvancedTCA, PICMG 3.0 R2.0, and IPMI v 1.5.

See Section 5.2 for detailed system specifications.

Deleted: .
Deleted: It
Deleted:
Deleted: ies
Deleted: ¶
Deleted: the following standards:
Deleted: Advanced TCA, PICMG 3.0¶ NEBS Level-3 and ETSI¶ IPMI v 1.5.¶
Deleted: ¶

# 2 Understanding the Shelf Components

This chapter summarizes the functional features of the Perform 2-Slot ATCA AC Shel and describes in further detail each of the components as well as the shelf system c mechanism.

The system was designed to withstand extreme conditions (to meet rigid Telco requirements). It is designed to incorporate Field-Replaceable Units (FRUs), and is fu field-serviceable.

## 2.1 Platform Components

A typical platform consists of the following key components:

- **19-inch rack mount shelf** — Base hardware element of the platform, which holds all the components together.
- **Card cage** — Portion of the shelf that holds the modules that are plugg into the backplane. Mechanically compliant with all aspects of PIMG 3.0
- **Backplane** — Supports one or two third-party ATCA-compliant front boards, and the complementary rear transition module (RTM). The backplane provides full-mesh Fabric interface, and direct mating to the PS's and to the redundant Shelf Manager carrier board.
- **Power Supply(PS)** – Redundant, field replaceable, 120 VAC to 240 V/ power supplies.
- **Fan tray** — Hot-swappable, provides side to side cooling, and is desigr to provide N+1 fan redundancy cooling to components on the front and rear of the shelf.
- **Air filter tray** — Keeps the airflow free of dust and particles.
- **Blank Panels** — For air flow management.
- **Shelf ID Board**
- **Cable management Holders** for Front cable management
- **Rear connection boards**

Deleted: Airflow Management

Formatted: Font: Bold, Complex Script Font: Not Bold

### 2.1.1 Shelf and Boards

*Figure 1* shows the block diagram of the shelf and *figures 2* and *3* show front and rear view the shelf with key components highlighted.

Formatted

Formatted: Bodytext

Deleted: See Figure 1 for a block diagram of the shelf, and

Figure 2 and

Figure 3 for front and rear views of the shelf, respectively.¶

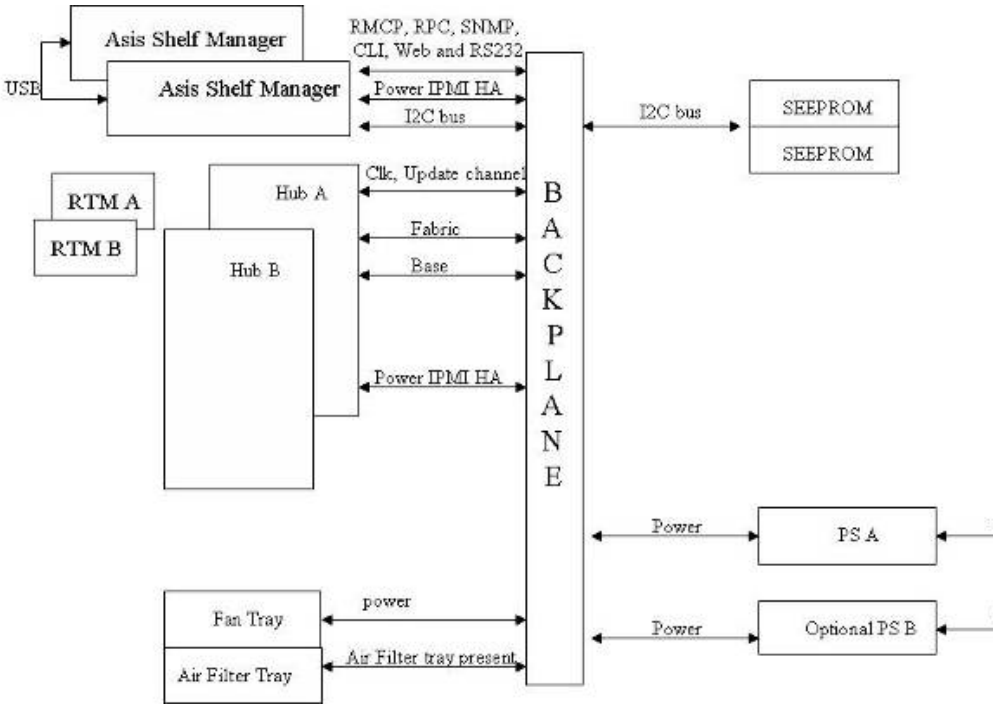


*Figure 1 – Shelf Block Diagram*

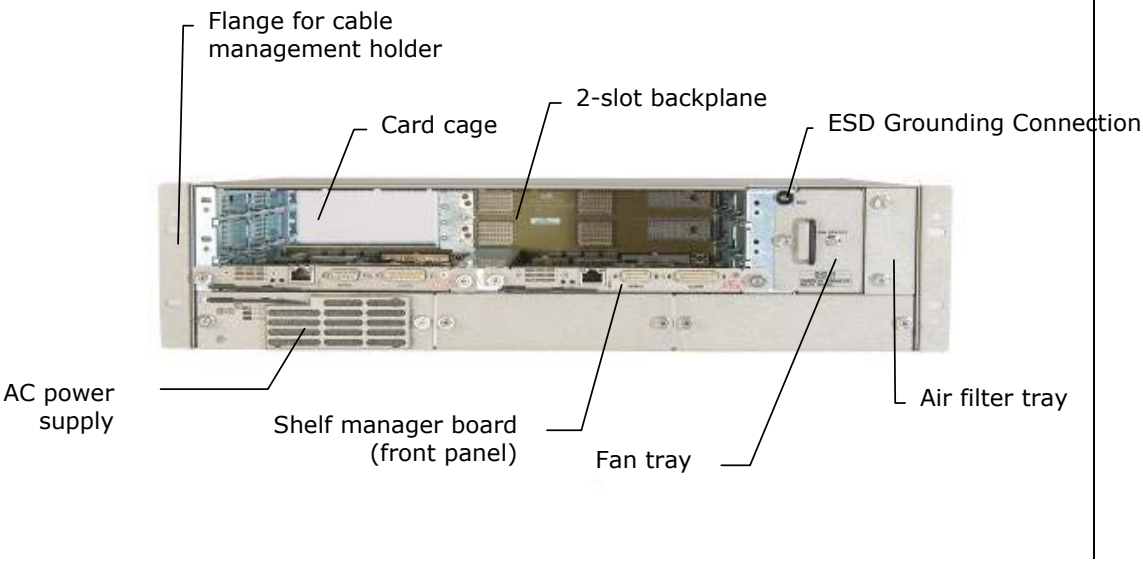


*Figure 2 – Shelf Front View*

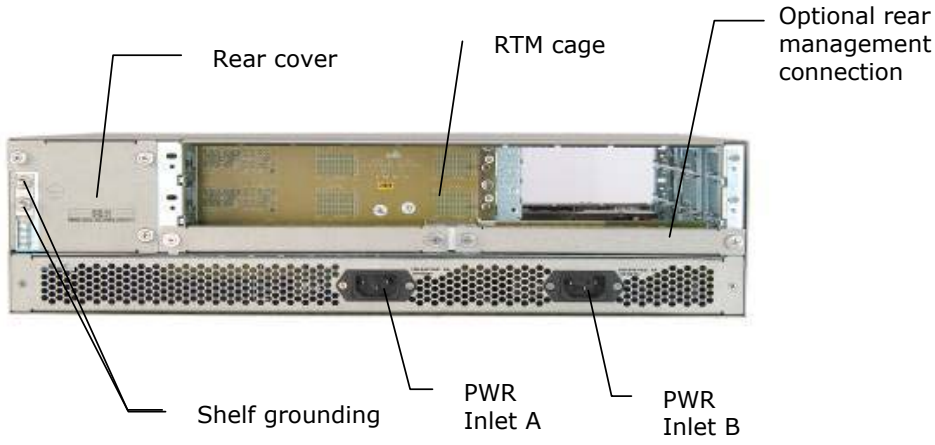


*Figure 3 – Shelf Rear View*

Figure 4 illustrates the use of cable holders:

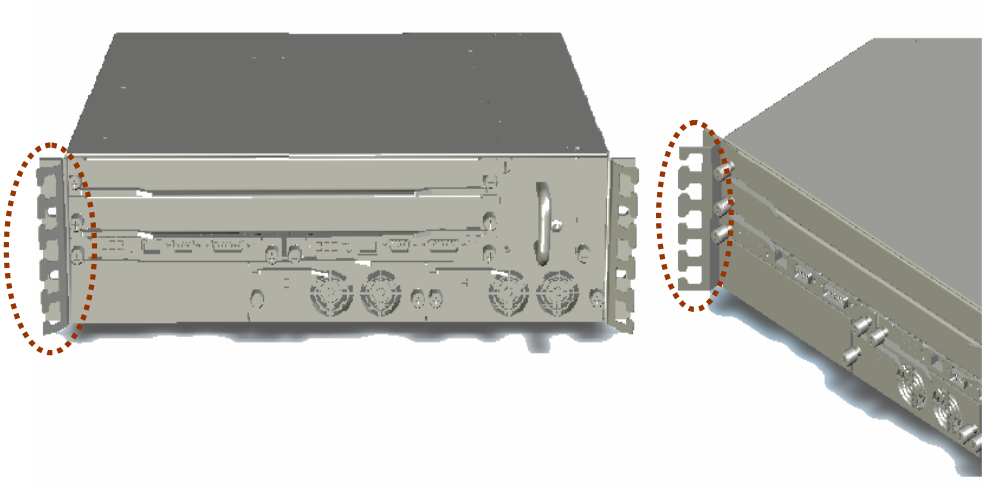

*Figure 4 – Shelf Chassis with Cable Holders*

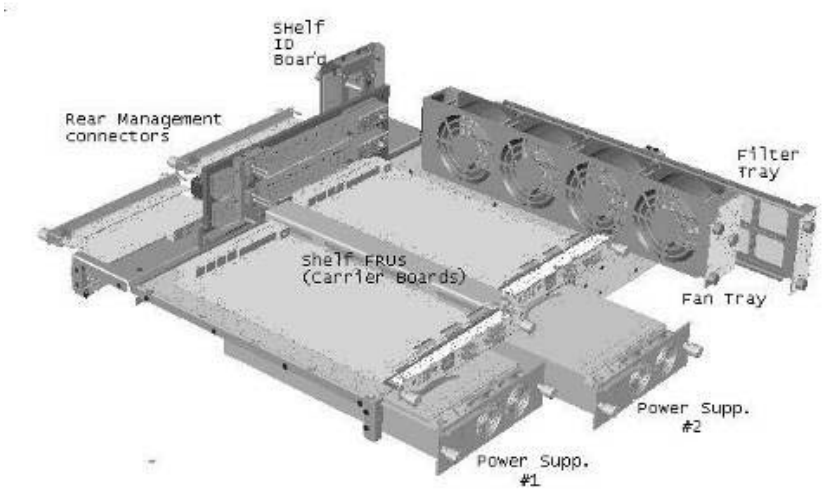


*Figure 5 - Shelf Component Positioning*

**Deleted:** availability

In order to increase ASIS Perform 2 slot ATCA AC Shelf reliability, and to simplify the shelf's format, only one of the boards installed in the Shelf has logic circuits in it. All other boards and FRU's are passive.

**Deleted:** Some are fixed boards and some removable

Only the backplane is a fixed board. Remaining boards are removable:

**Deleted:** *s*

***Fixed Board***

- Backplane

***Removable Boards***

- Shelf Management – Carrier board (see the ASIS Shelf Manager Board User Manual).
- Shelf ID: this board hosts two E²PROMs that contain data about the shelf - such as serial number and manufacturer – and about the board's setup – such as shelf thermal budget and slot population.

**Deleted:** <#>Shelf ID: this board hosts two SEEPROMs that contain data about the shelf – such as serial number and manufacturer – and about the board's setup – such as shelf thermal budget and slot population. (see Section 2.1.92.1.9)¶

**Formatted:** Bullets and Numbering

**Formatted:** Indent: Before: 2.22 cm, Hanging: 0.63 cm

## 2.1.2 Card Cage

The shelf's card cage is composed of:

- the backplane
- right and left guide rails to hold the modules that plug into the backplane.

The card cage supports two 8U front boards, and two 8U RTMs.

The guide rails in the card cage incorporate *electrostatic discharge (ESD)* clips.

### 2.1.3 Backplane

#### *Features*

The ATCA PICMG 3.0-compliant backplane provides external interfaces and card connectivity. It conforms to the *PICMG 3.0 R2.0 AdvancedTCA Base Specification*. Backplane features include:

- Two slots
- Fabric interface with full mesh interconnect.
- The Fabric Interface grid consists of eight differential pairs per channel, The Base Interface grid consists of four differential pairs per channel.
- Dual-star Ethernet signalling environment on the Base interface
- Bussed IPMI (radial IPMI available upon request)
- Two hub slots
- Hub/Node configuration; update channel between slots 1 and 2.
- 10, 100 and 1000 BASE-T dual star Base Interconnect capability. Updat channel interfaces for active and standby synchronization, and mesh topology handling up to 5Gbps per differential pair.
- Connection capacity for up to two third-party ATCA-compliant front boards, as well as to the redundant Shelf Manager Carrier and redunda AC power supply.
- Full compliance with AdvancedTCA™ electrical and mechanical specifications (Basic backplane topology is "full mesh".)
- Interconnect for system power for two slots.
- Base channel 1 allocated for the Shelf Manager Controller.

Deleted: is
Deleted: .
Deleted: ¶
Deleted: y
Deleted: C
Deleted: and power and control for the fan tray.

There are no active components on the backplane, and no removable or serviceable on the backplane board.

The backplane has two functionally-distinct parts: right and center left:

- Right backplane (consists of Zone 1 connectors) – dual-power connections, which means the power connections from the two PS's are independently supplied to each module plugged into the backplane.
- Center-left backplane (consists of Zone 2 connectors) – connectivity for the Base, Fabric, and update-channel interface. This portion supports a full-mesh topology for both the Base and the Fabric interfaces.

#### *Update-Channel Connections*

The update channels are backplane connections between pairs of modules that opera on a redundant basis. Application software can use the update channel for redundan interlock, or to provide a direct connection that bypasses the (indirect) fabric interfa

If you configure a pair of modules to use the update channel for redundancy support must insert the two modules into slots linked by an update channel.

**Comment [y1]:** REF??

Figure 6 shows the update channel connections.

Each update channel consists of 10 differential-pair connections. If an update channel connects two modules that are not identical, the Shelf Manager disables the update channel between them.

### *Synchronization Clock Interface*

The backplane supports a set of synchronization clock buses that can exchange synchronization timing information. This synchronization can be used for system-wide and intersystem synchronization purposes, which are important in some applications, such as those involving synchronous time division multiplex (TDM).

**Deleted:**

**Deleted: #**

**Deleted:**

**Deleted:**

**Deleted:**

**Deleted:**

**Deleted:**

**Deleted:**

**Deleted:** Rx4 (UP)-

**Deleted:**

**Deleted:**

**Deleted:**

**Formatted Table**

| Row # | Interface | Px20 Connector Pairs | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| | | ab | | cd | | ef | | gh | |
| 1 | Clks | CLK1A+ | CLK1A- | CLK1B+ | CLK1B- | CLK2A+ | CLK2A- | CLK2B+ | CLK |
| 2 | Update channel & Clks | Tx4(UP)+ | Tx4(UP)- | Rx4(UP)+ | Rx4(UP)- | CLK3A+ | CLK3A- | CLK3B+ | CLK |
| The update channels are routed to adjacent slots. Slot 1 connects to Slot 2. | | | | | | | | | |

*Figure 6 – Synchronization clock and update channel pin assignments*

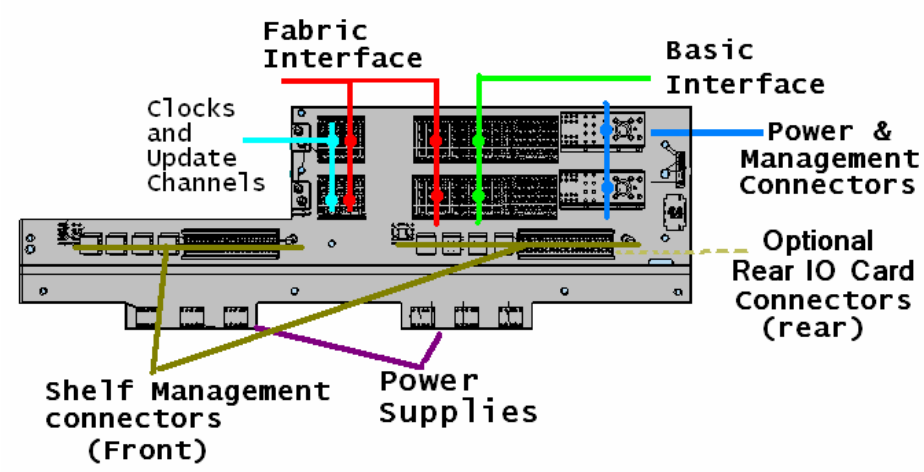


*Figure 7 – Backplane layout*

### 2.1.4 Module Slot Identification

The shelf is compliant with PICMG 3.0 R2.0, and accepts modules compliant with thi standard.

Figure 8 illustrates the locations of the module slot allocations when viewed from the front. The physical and the logical slot allocations are the same for this shelf: the slo are numbered 1 to 2 from bottom to top.




*Figure 8 – Slot Allocations*

The following table shows the hardware addresses in relation to the slot numbers an addresses. Slots are shown in the same order as they appear in the shelf: slot 2 abo slot 1.

Formatted Table

| Slot Number | Hardware Address (8 bit format) | Hardware Address (7 bit format) |
|---|---|---|
| 2 | 84h | 42h |
| 1 | 82h | 41h |

*Figure 9 - Shelf Addressing*

### 2.1.5 AC power supply

The field replaceable, 120 VAC to 240 VAC, power supplies provide power to the she

The ASIS Perform 2 slot ATCA AC Shelf is equipped with AC connectors for two redu – hot swappable and field replaceable power supplies.

Both power supplies are located in the lower part of the shelf, on a drawer that slide to the Lower-middle part of the chassis, fitting directly into to the backplane and the connectors. Each PS has its own front-back independent cooling. In order to comply NEBS GR63 Core the power supply drawers have separate removable air filters.

The AC connectors are located on the rear of the chassis.

Deleted: התמונות לא מעודכנות

*Figure 10 – ATCA 1200W AC Power Supply*

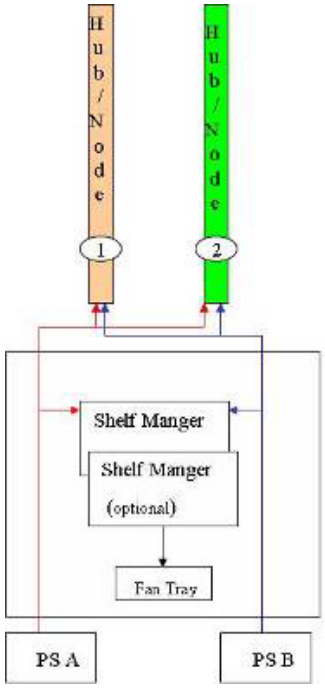


*Figure 11 – Distribution of Power on Shelf*

**Deleted:** *Distribution*

**Deleted:** The PEMs provide protection for the shelf against EN61000-4-5 surge transients. The PEMs reduce the surge transients to under -100V for a maximum duration of 10µs, and under -200V for a maximum duration of 5µs. Protection against EN610000-4-4 EFT transients is also provided.¶
The PEM being removed also continues to receive power until it is physically disconnected from the system or from the building's power source.

## *Grounding Requirements and Power Input*

When connecting ground and power cables to the shelf, follow instructions in the beginning of this document.

### 2.1.6 Fan Tray

Deleted:

The fan tray is a closed module containing four 80x80mm fans that supply air volum and velocity for cooling the high-density/high-performance computing environment ( Figure 12). The cooling power of the four fans can dissipate the heat generated by u two front boards and complementary RTMs.

Deleted: by

Deleted: Up to

Formatted: Not Highlight

Deleted:

Deleted: Maybe more

More than 200W for front board and 15W for RTM, per slot is supported.

Three of the fans are dedicated to cooling the front side of the shelf, while the fourth is shared between the front side boards and the rear side I/O equipment.

The fan tray is designed with N + 1 redundancy to meet the cooling requirements of shelf.

Deleted: the fan tray must be replaced as soon as possible

Deleted: will

In case of single fan failure, the remaining fans provide the required cooling to dissip the heat generated by the occupied slots. It is recommended to replace the fan tray soon as possible.

Deleted: the shelf does not have to be shut down during the replacement.

The fan tray is factory-mounted in the Perform 2-Slot ATCA AC Shelf. It is easily replaceable, and can be replaced while the shelf is operating.

For more on shelf cooling, see Section 2.2.

Deleted: לא מעודכן

*Figure 12 – Fan Tray*

### 2.1.7 Air Filter Tray

A NEBS-GR63-compatible air filter comes installed on the ASIS Perform 2 slot ATCA Shelf. The filter is field-serviceable, and can be extracted for periodic field maintenar or for field replacement.

Deleted: d

The filter is easily accessible from front right side of the card cage. A shelf-based mi switch detects the installed filter and reports its presence to the Shelf Manager.

For instructions on air-filter maintenance, see Section4.1.2.

*Figure 13 – Air filter tray*

Deleted: Airflow-Management

### 2.1.8 Blank Panels with/without air baffles

Compliance with ATCA's temperature specifications requires a steady air flow in the she
To insure a steady air flow, either the ASIS Perform 2 slot ATCA AC Shelf must be fully
populated, or a blank panel, available from ASIS, must be equipped to fill every empty
slot.

The "blank panel" is designed to emulate the air flow restriction in a standard card, thus
ensuring the required conditions for proper cooling.

Three types of airflow-management panels are available for the empty slots on the shel
These include panels specifically designed for:

- blank front module panels, with/without air baffle;
- blank RTM panels;
- an empty shelf-manager panel slot.

Deleted: empty
Deleted: slots
Deleted: empty
Deleted: slots

Deleted: צבע לא תואם¶

*Figure 14 - Blank Board Panel and Blank RTM Panel*

Formatted: Normal

### 2.1.9 Shelf ID Board

A shelf ID board containing two redundant field replaceable E²PROM chips is housed rear of the Perform 2 slot ATCA AC Shelf.

The E²PROMs store product and manufacturer information such as shelf serial numb part number, backplane routing assignment, and shelf heat budget.

When the Shelf Manager board boots up, it compares the information stored in the t E²PROMs:

- If E²PROM data coincides, it is loaded and saved in the ShMM Board, and the shelf initializes.
- In case of a mismatch, the data on the E²PROMs is compared with the saved configuration in the ShMM Board:
  - If the saved configuration matches one of the E²PROMs it is assun to be the right one and it is stored in both E²PROMs.
  - If the three configurations are all different, the Carrier board will r boot up.

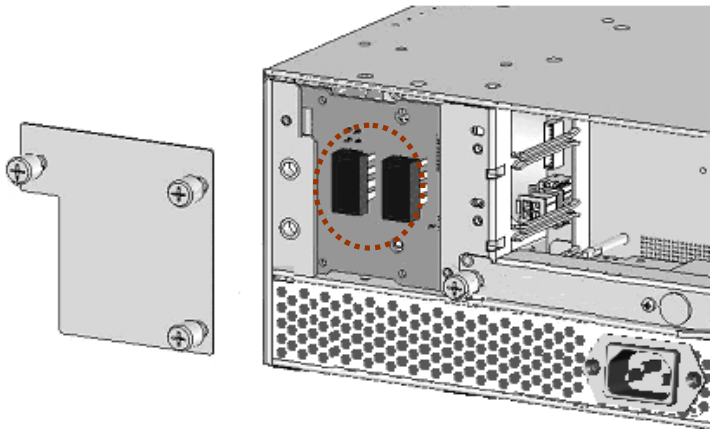

*Figure 15 - Shelf ID Board with two E²PROMs (rear cover removed)*

### 2.1.10 Holder for Cable Management (Optional)

A cable holder frame can be fitted to both side mounting flanges of the shelf.

Cables attached to the cable management holder must be allowed to move freely; Insure that a service loop of minimal required length is maintained.

Deleted: C

Deleted:

Deleted: לא מעודכן

Deleted: As standard, a

Deleted: The cable management holder is an optional device, specifically designed to cope with the large number of connecting cables and fibers found in a shelf such as the Effective 2-Slot ATCA Shelf.¶

Formatted: Highlight

Deleted: special

Formatted: Highlight

Deleted: ¶

# 2.2 Shelf Cooling

## 2.2.1 Overview

ASIS Perform 2 slot ATCA AC Shelf complies with all the cooling requirements specified PICMG V3.x specifications.

The cooling system consists of four high-performance fans. The air comes in from the right side and exits through the left side of the shelf. The fault-tolerant design is optimized for airflow of more than 200W per module.

## 2.2.2 Fan Tray Design

ASIS Perform 2 slot ATCA AC Shelf ventilation is achieved by four 80x80 mm fans, installed in the fan tray. The fans provide for n+1 redundancy.

*Figure 16 - Fan and Air filter trays*

The fan tray connects directly to the backplane, where it plugs into power and control connectors. The fan tray unit is front-serviceable, and can be easily replaced without tools.

In order to minimize possible failures, the fan tray does not contain any active electroni components. The shelf management FRU fully controls adjustments of the fans based o temperature changes.

Cooling ability is maintained even in the case of a single fan failure. In this case, the green LED of the fan tray turns red, so that it is easier to identify the tray that needs to be replaced.

**Deleted:** how the fans

**Deleted:** to

**Formatted:** Not Highlight

**Formatted:** Not Highlight

**Formatted:** Not Highlight

**Deleted:** Is this the right way to say it in English?

## 2.2.3 Performance

**Formatted:** DescriptionA, Adjust space between Latin and Asian text, Adjust space between Asian text and numbers

The four fans supply air volume and velocity for cooling the high-density/high-performance computing environment. The cooling power of the fans can dissipate the heat generated by up to two front boards and complementary RTMs. At least 200W per front board and 15W for RTM per slot is supported.

The system maintains its cooling performance even in case of a single fan failure. In this case, the green LED of the fan tray will turn red, so that it will be easier to find t failing tray and replace it.

Refrain from clogging air input and exhaust during chassis operation.

**Deleted:** Ensure that the air entering the shelf remains within the specified maximum temperature limit. If the air temperature exceeds the specified maximum, and the fan tray operating at full speed is unable to maintain the FRUs within their recommended temperature limits, the platform could begin to reduce the thermal load, which could reduce platform performance. This response to excessive temperatures protects the modules from physical damage caused by overheating.¶
If the surrounding temperature exceeds the non-operating temperature limit, the platform could shut down system modules in order to reduce thermal load.¶

**Formatted:** Highlight

**Formatted:** Bullets and Numbering

### 2.2.4 Fan Speed

When a fan tray is inserted into the shelf, the fans start at full speed and then decre by steps of 7%. Under normal operating conditions, the fans run at 21% of full spee The lower speed reduces the acoustic noise and increases the longevity of the fans. circuitry on the fan trays uses a pulse-width modulation to control the speed of the f

The speed of each individual fan is monitored. If the speed of any of the fans drops l the desired fan speed, the other fans will speed up to compensate. The Shelf Manag logs such events in its system event log (SEL) as a fault condition. If this occurs, rep the fan tray as soon as possible to restore fault tolerance and redundancy.

### 2.2.5 Rear connection boards

As an option, two rear connection boards can be installed in the rear part of the ASI Perform 2 slot ATCA AC Shelf.

These connection boards allow the user to connect the Ethernet LAN and the management console, to the rear part of the shelf instead of the front. In case this connection is to be used, a series of "jumpers" have to be set on the Shelf FRU.

The shelf is equipped with two redundant – hot swappable and field replaceable rear connection boards (optional) , where one is active and the second one provides redundancy.

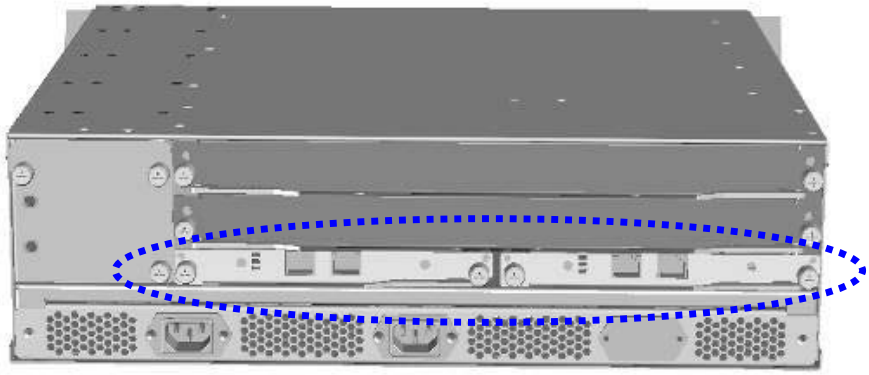

*Figure 17 - Optional Rear Connection cards*

# 3 Installing the Shelf

This chapter provides you with instructions on how to prepare the Perform 2-Slot ATCA AC Shelf for use.

You will be performing some or all of the following setup tasks:

- Site Planning
- Checking Package Contents
- Rack Mounting
- Power Supply installation.
- Shelf Application Card Insertion
- Redundant Module Installation.

Before installing the Perform 2-Slot ATCA AC Shelf, you should be aware of what cables will be needed for equipment and power, and whether they will be connected in the front or rear of the shelf.

## 3.1 Tools Required

To install the shelf in a standard 19" rack, the following tools are required:

- Standard Philips screwdriver set
- Wrench
- ESD grounding bracelet.

All the modules in the Perform 2-Slot ATCA AC Shelf are field-replaceable units (FRUs) requiring no special tools for mounting other than those mentioned above.

## 3.2 Site Planning

Only qualified personnel should be involved with this installation procedure.

The Perform 2-Slot ATCA AC Shelf can be installed either on a standard 19" rack or as a desk-top unit. All sides of the shelf should be easily accessible.

The prerequisites for setting up the Perform 2-Slot ATCA AC Shelf for use in your facility involves:

- If a rack is used, it should be properly grounded.
- A readily accessible disconnect device must be incorporated into the building's wiring between the shelf's PS's input terminals and the power source.

- The disconnect device rating required is determined by the nominal inp voltage.
- To ensure sufficient airflow for the individual blades in the shelf, allow a least two inches of clearance at the side air inlets and outlets.

## 3.3 Checking Package Contents

The following items are included in the Perform 2-Slot ATCA AC Shelf package. Chec that all items in the package are intact.

Use of equipment damaged during delivery could prevent proper functioning the Shelf and/or cause permanent damage to it. Check all pins, screws and o components before using any of the package contents.

- Shelf chassis with backplane
- Fan tray
- Air filter tray
- 1 1200W Power Supply
- 2 Cable-management holders (optional).

## 3.4 Installation Steps

The following overall procedure is described more in detail in the sections below.

**Deleted:** cable

1. Install the Cable-management tray holder (optional).
2. Mount the chassis in the rack with four screws.

**Deleted:** ss

**Formatted:** Not Highlight

3. Connect the chassis to the site ground with a ground cable.
4. Insert a Shelf Manager board into the right slot.
5. Connect the power supply to a properly grounded mains socket.

## 3.5 Rack Mounting

You will need four M6x10 (or longer) screws to mount the chassis on the rack.

Before you begin:

- Verify that the transient operating temperature in the area of the rack does not exceed the 55°C maximum, and that the rack has support rail installed.
- Confirm the rack is stable so that the weight of the shelf does not caus to tip over.

➔ **To mount the shelf on the rack:**

- Two Persons needed to Preform this task.
- Insert the Perform 2-Slot ATCA AC Shelf chassis on the 19" rack, securing it by fastening the four mounting screws.

  The shelf should be level, and not positioned at an angle in the rack, and the rack's doors should be able to close.

### 3.5.1 Shelf Grounding

Connect rear grounding screws on the rear left side to insure that the shelf is properly grounded.

Deleted: ¶

*Figure 17 - Rear grounding screws*

### 3.5.2 Installer Grounding

Any person involved in handling the shelf or card installation or replacement is required to wear an ESD grounding device.

One grounding sockets can be found on the shelf:

- an ESD grounding socket in the front of the shelf

*Figure 18 - Front ESD Socket*

Formatted: Bullets and Numbering

## 3.6 Shelf Application Card Insertion

Third-party application cards must be ATCA-compliant.

Application cards should be inserted only after the installation, power-up and testing procedures of the Perform 2-Slot ATCA AC Shelf have been completed.

Insert application cards according to the manufacturer's instructions, making sure th are properly-positioned in their slots and are secured to their respective connectors.

When an application card is inserted and powered up, the blue LED should switch on light steady for 10-30 seconds (depending on the card type). After that time, the blu LED should blink for about 10 seconds, and then go off.

Each third-party application card must provide a hot-swap LED. This LED can be in o the following states:

| Indicator State | Indication |
|---|---|
| **Off** | The card is not ready for removal or disconnection from the shelf |
| **Blue** | The card is ready for removal or disconnection from the shelf |
| **Blinking slowly** | The card is activating itself |
| **Blinking quickly** | Brief deactivation has been requested |

Formatted: Bullets and Numbering

## 3.7 Redundant Module Installation

### 3.7.1 Redundant Shelf Manager board Installation

The redundant Shelf Manager Board is installed after the first shelf has finished booting up.

Follow the instructions for the first Shelf Management card in the Shelf Manager use manual.

# 4 Maintenance And Troubleshooting

This chapter includes instructions regarding:

- Performing Periodic Maintenance
- Fan tray visual inspection
- Air filter cleaning and replacement
- Figure 19 – Shelf Air filter and Power supply air filter extraction
- Handling Electromagnetic Interference
- Extracting Modules
- Handling Alarms
- Hot-Swapping FRUs
- Resetting The System
- Troubleshooting.

As required by the ATCA standard, the Perform 2-Slot ATCA AC Shelf applies a fully hot swappable approach. Assuming redundancy has been provided for (i.e., two ShMM boar units, and two PS's), all of the shelf assemblies can be field-replaced with no interruptic to service.

**Deleted:** management

Visual alarms provide clear indication of trouble, for easy problem location.

Malfunctions can be responded to quickly and easily, as no field repair is necessary. Failed modules can be easily extracted and replaced with no tools or with a minimal set tools.

## 4.1 Performing Periodic Maintenance

This section provides procedural instructions on servicing or replacing shelf components

Maintenance of the Perform 2-Slot ATCA AC Shelf involves the following tasks:

- Fan Tray Visual Inspection
- Air Filter Cleaning And Replacement.
- inspection of the front led of the shelf manager

### 4.1.1 Fan Tray Visual Inspection

The fan trays should be checked periodically for any visible damage that could prevent disrupt normal fan operation.

### 4.1.2 Air Filter Cleaning And Replacement

The air filter should be checked regularly. If environmental conditions are good, it may enough to extract the filter and vacuum clean it. Otherwise it might be necessary to replace it.

The air filter can be ordered separately (i.e., without the metal tray).

Air filter cleaning must be performed in a different location from where the shelf is placed.

The air filter can be extracted without interrupting power. Release the two tumble sc on the front side of the air filter unit and extract the unit by pulling the two tumble screws.

as for the Power supply filter ,pull it up without interrupting the normal operation of chassis.

*Figure 19 – Shelf Air filter and Power supply air filter extraction*

## 4.2 Handling Electromagnetic Interference

The shelf emits electromagnetic waves that may interfere with nearby equipment. Conversely, nearby electronic equipment may emit electromagnetic waves that inter with the shelf. The EMC, EMI, and RFI specifications of the shelf and all nearby equip should be considered when choosing the placement of the platform and surrounding equipment.

In the shelf and most other equipment, the use of **airflow management fillers** in otherwise unoccupied slots is necessary to keep the product's emissions within their specified limits.

- Install front and rear airflow management fillers into any empty slots.
- Do not use blank faceplates in place of fillers.
- Keep slots populated with active modules directly next to each other ar fillers directly adjacent to the outermost active modules.
- If the shelf experiences unexpected and intermittent data errors, carefu consider the possibility of electromagnetic interference from nearby equipment as a possible source of the problem.

**Deleted:** , leaving no empty slots in the final shelf configuration.

Identifying and measuring errors caused by electromagnetic interference can be challenging and may require the assistance of engineering personnel with experienc this field.

If your system configuration does not populate all front slots with active blades, you mu
fill those empty slots with additional blades or slot flow blocker blades to maintain syste
airflow and electromagnetic shielding integrity. Blank panels can be ordered separately.

**Deleted:** blades

## 4.3 Extracting Modules

### 4.3.1 FRU Module Extraction

➔ **To extract an ATCA-compliant FRU module:**

1. Pull the module's insertion lever slightly.

   The de-activation sequence begins.
2. After the module's blue led lights steady, pull out the module's insertion lever.
3. Pull out the module.

**Formatted:** Bullets and Numbering

### 4.3.2 FRU Module insertion

➔ **To insert an ATCA-compliant FRU module:**

1. Push the module's insertion lever inward carefully.
2. Look at the blue led & see if it lights.

   The activation sequence begins.
2. After the module's blue led turn off, the module is active.

**Formatted:** Bullets and Numbering

### 4.3.3 Power Supply Extraction

If Power Supply redundancy is implemented, one of the PS can be extracted without stopping service.

➔ **To extract one PS:**

1. Disconnect the power cables.
2. Release the two tumble screws on the front side of the PS.
3. Fully pull out the PS' insertion lever.
4. Pull out the Power Supply.

**Formatted:** Bullets and Numbering

### 4.3.4 Power Supply insertion

➔ **To insert PS:**

1. Disconnect the power cables.
2. Fully Push the PS in thwarted the Backplane, carefully slid inward the insertion lever
3. Connect the power cables, look the front led for activation.

Formatted: Bullets and Numbering

### 4.3.5 Fan Tray Replacement

The shelf should be used only with a fully-operational fan tray. A malfunctioning fan should be replaced immediately, in order to prevent thermal damage to the installed application cards.

Deleted: .

Use care when handling the fan trays, and do not handle them from the connectors. Improper handling of the fan trays could cause damage to the connector pins.

Do not handle a fan tray while the fans are operating.

➔ **To replace the fan tray:**

1. Without interrupting power, release the two tumble screws on the front side of th fan tray.
2. Extract the tray by pulling at the handle, as shown below:

*Figure 20 – Extracting a Fan Tray*

3. Insert the replaceable fan tray unit.
4. Push each of the two thumbscrews in and tighten.

Formatted: NumList A
Formatted: Normal
Formatted: Bullets and Numbering

### 4.3.6 E²PROM Replacement

Formatted: Highlight

E²PROMs are generally installed and handled only in the factory. Follow the procedu below in the rare case that it becomes necessary to field replace the E²PROMs.

➔ **To replace an E²PROM:**

1. Without shutting down the system, remove the rear panel, near the two chassis screws, by unscrewing the three tumble screws.
2. With the correct tool such as PLCC extractor or equal carefully remove the E²PR (U1, U3 or both) from the board.
3. Insert the new E²PROM (U1, U3) into place; make sure it is inserted to the socke the correct manner.

Deleted: four
Deleted: With a flat screwdriver, g
Deleted: s
Deleted: one at a time
Deleted: .
Deleted: two
Deleted: s
Deleted: one at a time

**Deleted:** four

4. Refasten the rear panel using the three tumble screws.
5. From the management console software, run the E²PROMS command manually (see the Shelf Manager External Interface Reference).

**Formatted:** Bullets and Numbering

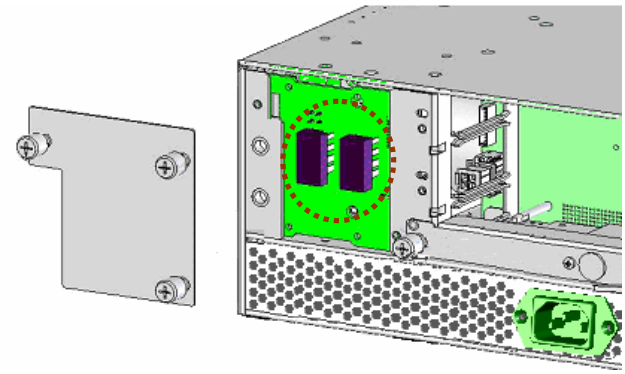

*Figure 21 - Fan Card with E²PROMs*

### 4.3.7 Third-Party-Module Replacement

As per ATCA specifications, all application modules must be hot-swappable.

For specific instructions regarding third-party module replacement, refer to the documentation provided by the manufacturer.

For general instructions on FRU module replacement, see Section 4.3.1.

## 4.4 Handling Alarms

Both visual indicators and software alarms are provided.

### 4.4.1 Visual Alarms

Formatted: Bullets and Numbering

Nine LEDs at the front of the Shelf Management card provide visual alarms.

LED Functions: General LEDs

| LED | Status | Meaning |
|---|---|---|
| ACT | Green | Shelf manager is active |
| | Red | Shelf manager failure |
| | Blink | Shelf manager is inactive |
| PWR | Green | Local voltage supply on Shelf manager is good |
| | Off | Local voltage failure |
| HS (hot swap) | Steady Blue | Shelf manager is powering up or ready for extraction |
| | Blinking blue | Shelf manager hot swap process |
| | Off | Shelf manager is operating |

**LED Functions: Telco Alarm LEDs**

| LED | Status | Meaning |
|---|---|---|
| CRT (Critical) | Off | Normal operation |
| | Red | System alarm event |
| MJR (Major) | Off | Normal operation |
| | Red | System alarm event |
| MNR (Minor) | Off | Normal operation |
| | Red | System alarm event |

Upon completion of boot-up, LEDs will display as follows:

| General LEDs | | Telco Alarm LEDs | Application Defined LEDs |
|---|---|---|---|
| ACT | return to normal state | OFF | OFF |
| PWR | Remains ON | | |
| HS | Lights steady blue for a few seconds, then begins blinking, then goes off after a few blinks | | |

### 4.4.2 Software Alarms

The ASIS Perform 14-Slot ATCA Shelf supports software alarms according to *PICMG Specifications 3.0*. Please refer to these specifications for a detailed description.

**LED Functions: Application-Defined LEDs**

| | LED | Status | Meaning |
|---|---|---|---|
| A | Green/ red/ bi-color | As defined by application | |
| B | Green | As defined by application | |
| C | Amber | As defined by application | |

## 4.5 Hot-Swapping FRUs

**Deleted:** — including integrated circuits, laser units, relays, and powered mezzanine modules —

All the active components in the platform are mounted on (or housed in) field-replaceat units (FRUs) that you can easily remove and replace. The subrack, backplane, and othe non-FRUs do not contain active components.

All FRUs are hot-swappable: you can remove and insert a FRU without shutting down ar other shelf component. Hot swapping facilitates planned maintenance activities and FRU replacement.

**Deleted:** an audible alarm and

The platform includes front-panel LEDs and a Telco alarm, which can be configured to activate when a hardware or software failure occurs. If an external alarm system is connected to the platform, it will also be activated for the alarm condition. The alarms alert an operator or technician to replace a failed FRU or perform some other maintenance operation.

The following procedures are to be used when modules are hot-swapped.

➔ **To remove a module:**

1. Partially open the module's right ejector latch to activate the module's hot-swap switch.

   The module's IPMC sends to the Shelf Manager a request to deactivate, and the blue hot swap LED blinks at a fast rate.

2. The Shelf Manager determines whether the module can be extracted. If it can, th Shelf Manager grants permission to the IPMC.
3. The IPMC disables the interfaces that are controlled by electronic keying, and shu down the module's operations. It then notifies the Shelf Manager the deactivatio complete. The blue LED remains lit.
4. Extract the module.
5. The Shelf Manager reclaims the module's power budget. Also, as part of electron keying, the Shelf Manager disables—on other modules—the interfaces that are o shared with the deactivated module.

## 4.6 Resetting The System

One or both of the following reset options should be used if the shelf management c not responding. (The second step should be performed only if the first one has not s the problem.)

1. Press the Reset button on the ShMC (Shelf Management Controller) Carrier boar front panel.
2. Extract the ShMC Carrier board from the chassis, and re-insert it.

**Deleted:** When a module is powered up, the sequence is similar to the one below, excluding ejector-latch activity.¶

➔ **To insert a module:**¶

1. After the IPMC powers up and the blue hot-swap LED is lit, close both ejector latches. ¶
2. Push each thumbscrew in and tighten.¶

The following sequence occurs:¶

3. IPMC announces the module's presence to the (active) Shelf Manager, and the blue LED blinks at a slow rate.¶
4. The Shelf Manager queries the IPMC, builds a sensor data record (SDR) repository, and begins periodically monitoring the presence of the module.¶
5. The Shelf Manager activates the module, and the module acknowledges activation.¶
6. The Shelf Manager determines the power and cooling budget, and sets the module's power level.¶
7. The Shelf Manager, based on electronic keying, enables compatible backplane ports.¶
8. The module notifies the Shelf Manager that it is active, and the blue hot-swap LED turns off.¶
9. The Shelf Manager continues to periodically monitor the presence of the module.¶

¶

**Formatted:** Bullets and Numbering

**Deleted:**

# 4.7 Troubleshooting

The following table summarizes potential problems and recommended solutions.

| Problem | Probable cause | Solution |
|---|---|---|
| shelf manager does not boot up properly:<br>One or more of the LEDs fails to light during boot-up.<br>The LEDs fail to return to their status as described in Section 4.4.1, above.<br>The blue LED does not blink. | shelf manager is not in fully inserted in the cage.<br>shelf manager malfunction. | Check that the shelf manager board is properly inserted in the cage; Verify that the ejector clip is closed.<br><br>Replace the shelf manager. |
| Fans fail to operate at power up | fan trays is not in fully inserted in the cage.<br>shelf manager is not in fully inserted in the cage.<br>shelf manager malfunction.<br>Fan tray cards malfunction. | Replace fan trays.<br>Replace the shelf manager. |
| Fan speed does not decrease after boot-up is completed | Shelf Manager board malfunction. | Replace the shelf manager. |
| Fan tray LED is lit red | One or more of the fans are not working.<br>Logic malfunction. | Pull the fan tray slightly out for few seconds until all fans stop spinning, and re-insert it.<br>Replace fan tray.<br>Replace shelf manager following this sequence:<br>Insert a second shelf manager in the redundant slot;<br>Issue a switchover command to switch shelf control from the current shelf manager to the redundant one. |
| Circuit Breaker trips off | Chassis power trouble. | Remove all third-party and shelf manager to isolate the malfunction.<br>Replace Power Entry Module. |
| Boot sequence does not complete, and the blue LED continues to blink after the Shelf Management card has been replaced and all relevant monitor commands have been performed | One of the Backplane's connectors is damaged.<br>One of the cage units, or the ATCA board, does not fit properly in the cage. | Replace E²PROMs. if you have not yet done so;<br>Replace chassis. |

# 5 System Specifications

This chapter documents the product's standards certification, and physical and other technical specification parameters.

## 5.1 Certification

The Perform 2-Slot ATCA AC Shelf is targeted for NEBS level-3, FCC, UL and CE certification. It complies with the following standards:

- Advanced TCA, PICMG 3.x
- IPMI v 1.5.

Deleted: <#>NEBS Level-3 and ETSI¶

## 5.2 Technical Data

The following table presents technical specifications for each of the product elements

| Category | Property | Description/ Value |
|---|---|---|
| **Physical** | | |
| | **Number of slots** | 2 slot 8Ux280mm, front blades;<br>2 slot 80mm, RTMs |
| | **Dimensions** | 133.35 mm (3U)"H x<br>448mm (17.637")W (19" rack mount) x413.4mm (16.275")Depth<br>not including handles & cable holders |
| | **EMI** | EMI gasketing and hardware spacing to support FCC part B |
| | **Weight** | 11Kg |
| | **Compliance** | PICMG 3.0 R.2.0 |
| | **Temperature** | Humidity: 5% to 95%, non-condensed |
| | | Storage Temperature:<br>-40° to +70° Celsius |
| | | Operating Temperature:<br>5° to +55° Celsius |
| | **Other** | Front and rear ESD jack |
| | | Front rack flanges |
| | | Front cable management tray |

Deleted: 100mm

Deleted: 910Kg

Deleted: 0

Technical Data

| Category | Property | Description/ Value |
|---|---|---|
| **Accessibility** | | |
| | **Front** | Shelf Manager, Fan Tray, Front boards, Air Filter Tray, Power Supply. |
| | **Rear** | Rear management modules, RTMs. |
| **Backplane** | | |
| | **Bus architecture** | Up to two third-party ATCA-compliant front boards, full mesh, dual redundant Shelf Management boards, bussed IPMB (radial by request). |
| | **Signal bandwidth rating** | Supports up to 5Gbps per differential pair. |
| | **Base interface** | Base channel interconnect between two ATCA slots, with support for 10/100/1000 BASE-T Ethernet; base channel 1 is allocated to ShMC (Shelf Manager) |
| | **Fabric interface** | Fabric channel interconnect between two ATCA slots; Replicated fabric channel upon request. |
| | **Hub/Node slots** | 2 logical slots 1 & 2; Hub/Node configuration |
| | **Update channels** | Update channel between slots 1&2 |
| **Power** | | |
| | **AC Power Supply** | Front redundant, self cooled, hot swappable, integral power supply. |

Deleted: 3.12

| Category | Property | Description/ Value |
|---|---|---|
| **Cooling** | | |
| | **Number of fans** | Front hot-pluggable fan tray with 4, N+1, axial fans for front and RTM slots |
| | **Redundancy** | N+1 (i.e., any one fan can fail with no service degrada |
| | **Fan speed** | Variable speed under shelf management control |
| | **Cooling capacity** | More than 200 Watt per front board, 15W per RTM slot - temp. rise: <9[C] |
| | **Air Flow (with air filter unit installed)** | Average of 65 cubic feet per minute (CFM) per slot |
| **Alarm I/O** | | |
| | **Electrical/Mechanical Placement** | Dual redundant Alarm I/O Modules accessible from fro chassis |
| | **Alarm I/O interfaces** | 15-pin DA-15P connector.<br>Supports 4 outputs (Major, Minor, Critical, Power) and 2 inputs (Major & Minor Reset) |
| **Regulatory** | | |
| | **Safety** | Designed to meet CE, UL, TUV requirements |
| | **EMC** | Designed to meet CE & FCC part 15 requirements |
| | **Environment** | Designed to be Compatible with NEBS level-3 and ET |
| **Other** | | |
| | **Shelf identity** | Configuration board with on-board EEPROM stores sh serial number, part number, backplane routing assignments, shelf heat budget and other data. |
| | **Removable top cover** | Available |

**Deleted:** 20W

# 5.3 Acronyms Used in this Manual

| Acronym | Meaning |
|---|---|
| **ATCA** | Advanced Telecom Computing Architecture |
| **FRU** | Field-Replaceable Unit |
| **HS** | Hot swap |
| **IPMB** | Intelligent Platform-Management Bus |
| **IPMI** | Intelligent Platform-Management Interface |
| **RTM** | Rear Transmission Module |
| **NEBS** | Network Equipment-Building Systems |
| **ShMC** | Shelf Manager card |
| **ETSI** | European Telecommunications Standards Institute |
| **ANSI** | American National Standards Institute |
| **CE** | "Conformité Européene" ("European Conformity") |
| **PS** | Power Supply |
| **FCC** | Federal Communications Commission |
| **UL** | Underwriters Laboratories - safety standards |
| **CFM** | Cubic Feet per Minute – Airflow measurement unit |

**Formatted:** Font: Bold, Complex Script Font: Not Bold

**Page vi: [1] Formatted** **Sharon Hauser Ainspan** **11:25:00 06/06/2007**

Font: (Default) Arial, Complex Script Font: Arial

**Page vi: [2] Formatted** **Sharon Hauser Ainspan** **11:28:00 06/06/2007**

Font: (Default) Verdana, 11 pt, Font color: Auto, Complex Script Font: Times New Roman, 11 pt, Bold, French France

**Page viii: [3] Deleted** **Tsach** **18:25:00 04/06/2007**

## Operating Environment

| | |
|---|---|
| **Temperature** | Storage temperature: -40°C to +705°C.????? Operating temperature: 0°C to +55°C. |
| **Humidity** | -5% to 95% (non condensed). |
| **Vibration** | Severe vibration can damage components לא הייתי כותב את זה????. |
| **Air** | The air surrounding the product should be dust-free and should not contain corrosive gasses or other materials that could adversely effect the product. |